



**GLION Pure Sine Wave Inverter User Manual**  
**Model No. 36500**



**Stop and read the Limited Warranty at the end of this User Manual before proceeding any further. If you disagree with any of the terms and conditions of the Limited Warranty, you must submit a written request to [support@getglion.com](mailto:support@getglion.com) for a Return Authorization within 3 days of delivery. Do not unpack the product. The product must be returned in its original box and in new and unused condition, accompanied by the original receipt. **The product serial number can be found at the bottom side of the inverter. Use the serial number and register your warranty on [www.getglion.com](http://www.getglion.com)****

### **Inverter User Manual Model No. 36500**

Thank you for purchasing a Glion Inverter by Probit Cell LLC doing business as GLION Electric Inverter. For your safety and the reliable operation of this product, please carefully read this User Manual in its entirety AND VIEW INSTRUCTIONAL VIDEOS on our website BEFORE operating this product. The information in this manual is accurate as of the time of publishing. To determine whether updates have been added, please visit our website ([getglion.com](http://getglion.com)) for the latest version of the User Manual. The website also provides videos demonstrating how to operate the product. Your Glion Inverter is covered by a warranty. For the specifics of this warranty, visit our website at [www.getglion.com](http://www.getglion.com). Please register your purchase at [www.getglion.com](http://www.getglion.com) for warranty coverage.

Please do not hesitate to contact us if you have any questions:

[support@getglion.com](mailto:support@getglion.com)

[www.getglion.com](http://www.getglion.com)

Probit Cell LLC

701 4<sup>th</sup> Avenue, Suite 7

Holdrege, NE 68949

855-500-2640



**WARNING: ENSURE THAT THE INVERTER IS RIGHT FOR YOU**

An inverter is not a toy. It is an electronic device and failure to follow safe operating procedures and safety warnings at all times could result in serious personal injury or death in addition to the injury or death of others. Additionally, to safely operate the Glion Inverter, you must be able to:

- Read and understand all Glion Inverter reference materials, including this Users Instruction Manual and all Glion Inverter safety instructions contained in this Manual.
- Have sufficient hand strength to hold the Glion battery and inverter.
- Recognize hazards in your environment.
- Use both hands operating the device.



## TABLE OF CONTENTS

SAFETY SPECIFICATIONS AND OWNER OBLIGATIONS .....	4
GLĪON GLION INVERTER MODEL 36500 SPECIFICATIONS.....	6
GLĪON MODEL 36500 PARTS DIAGRAM.....	7
Inverter Warning Label and Serial Number .....	7
OPERATING GLION INVERTER.....	8
GENERAL TROUBLESHOOTING .....	9
CLEANING, STORING, AND SERVICING .....	10
PRODUCT REGISTRATION.....	10
GLĪON Inverter LIMITED WARRANTY.....	11

## **SAFETY SPECIFICATIONS AND OWNER OBLIGATIONS**

**1. SAFETY INSTRUCTIONS.** The below instructions and tips will help you to operate your Glion Inverter safely. PLEASE NOTE - The Glion Inverter is designed to be used by one person at a time and is not recommended for any person younger than 16 years old.

- **It is your responsibility to read this manual and all safety and training instructions and all warning labels before operating the Glion Inverter.**
- Do not use other brand batteries or outside of the United States.
- Comply with all local laws and regulations while operating the Glion Inverter.

### **2. SAFE OPERATING CONDITIONS:**

- Do not operate this inverter in rainy or wet environment
- Do not cover or obstruct any air vent openings and/or install in any zero-clearance compartment
- Prolonged exposure to heat or freezing temperature will reduce working life of the inverter
- Only use Glion Battery intended for Balto Electric Scooter
- Wear eye protection and gloves are recommended
- Do not have smoke or any fire/flammable source (fume or gas) near the device
- Avoid dropping this device or associated battery on hard surfaces.
- Avoid dropping heavy or metal objects onto this device or battery.
- Avoid direct sunlight, heat source, moisture, dusty or conductive contaminants while operating or storing the inverter and battery
- Do not have strong magnetic devices near this device.
- Avoid touching eyes while using this scooter
- Do not let children operate this inverter
- Do not operate this inverter on surfaces that are wet, frozen, oily, or unpaved.
- Never put inverter in bed with linens or with other flammable objects
- Never put heavy objects on top of the inverter.
- Do not exceed the maximum load capacity (500watt).
- Do not use in connection with life support systems or other medical devices
- Do not OPEN the inverter shell under any circumstances to avoid shock or explosion hazard
- Do not use it with any other lithium ion battery.
- Always make sure the appliance used is under 500 watt power rating and is 110v 60 Hz
- Turn off the inverter immediately and disconnect battery if the device or battery is too hot to touch

**3. GUEST USE:** Never permit a guest to use this inverter unless the guest has read the user manual and all the warnings.



**WARNING: Shock Hazard and Explosion Hazard. Keep away from Children! This product should not be used by persons unwilling or unable to take responsibility for their own actions.**

**4. INSURANCE:** YOUR INSURANCE POLICIES MAY NOT PROVIDE COVERAGE FOR ACCIDENTS INVOLVING THE USE OF THIS INVERTER. TO DETERMINE IF COVERAGE IS PROVIDED, CONTACT YOUR INSURANCE COMPANY OR AGENT **BEFORE** USING THE DEVICE.

**5. OPERATOR AGE:** Do not allow anyone under the age of 16 to operate this inverter. This inverter is designed for operation by one person age 16 or older.

**6. SURROUNDINGS:** Use your inverter in a controlled environment away from hazards. Never operate the inverter near steps or swimming pools.

**7. INTENDED USE:** This inverter is not designed or intended for industrial or commercial usage.

**8. TEMPERATURE:** Do not use the inverter when the temperature is below -5 C (23 degrees F) or above 40 C (104 degrees F)

**9. WEATHER CONDITIONS:** Avoid using in wet conditions.

**10. WATER RESISTANCE:** This inverter is NOT water resistant.

**11. SAFETY WHEN NOT USING:** When the inverter is not being used, place it in a safe stable and secured environment, keep it away from fire, water and other hazards.

## GLION GLION INVERTER MODEL 36500 SPECIFICATIONS

Performance	Instant Maximum Load	740 watt
	Normal Load	500 watt
	Output Voltage/Frequency	110v / 60Hz AC current
	Input Voltage	36 Volt DC current
Associated Battery	Voltage	36V DC
	Type	Glion Li-ion Battery for Balto Electric Scooter
	Capacity	10 AH

- Performance based on lab testing data.

# GLION MODEL 36500 PARTS DIAGRAM

Battery  
Input  
connector

On/Off  
Switch



AC Socket  
for your  
appliances

Expansion Portal  
connecting to  
combiner box  
(combiner box not  
included)

**Inverter Side View 1**

Balto Battery  
(Not included)



LCD Display: Wattage,  
Battery Level Indicator  
Input Voltage  
Error Code (When error  
occurs\_

**Inverter Side View2**



**Inverter Warning Label and Serial Number**



## OPERATING GLION INVERTER

Take the inverter out of box. Choose a safe clean environment. **Make sure you following safety instruction and safe operating conditions specified above. Make sure On/Off switch is OFF.**

Step 1: Carefully take Balto battery from Glion off the Glion Balto Electric Scooter and install it onto the battery docking base provided with the inverter. Tighten the strap.




Step 2: Insert the plug from the battery docking base into the 36v DC socket on the inverter



Step 3

Plug your AC appliances (make sure its power rating is under 500watt) into the AC 120v socket on the inverter. Then turn on the ON/OFF switch. You should see voltage showing on the LCD screen. A fully charged Balto battery should show around 41volt. If you start to use your appliance, inverter LCD screen should show the working power wattage. Fan should start to work if internal temperature is reaching preset level.

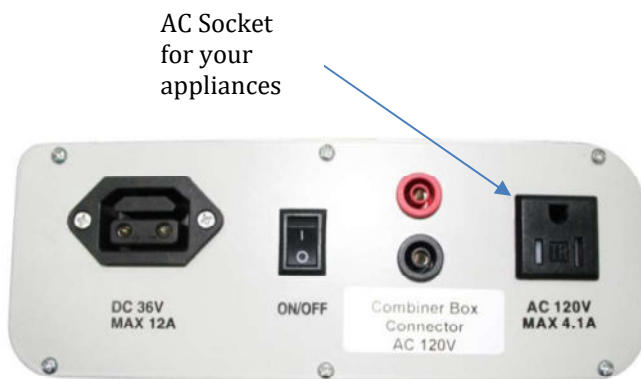

#### Step 4

Always turn OFF the switch BEFORE you unplug your appliance from the inverter.



**WARNING: Attempting to use this product against the safety instructions and out of normal operating range (<500w) can result in fire/explosion and serious injury or death.**

**For Battery Safety, Charging and Operation, please refer to Glion Electric Scooter's owner's manual.**

#### **BATTERY DISPOSAL:**

Your Glion product uses lithium ion batteries, which must be recycled or disposed of in an environmentally safe manner. Do not dispose of a lithium ion battery in a fire. The battery may explode. Do not dispose of a lithium ion battery with your household trash. The incineration, landfilling, or combining a lithium ion battery with your household trash is prohibited in most jurisdictions. Locate a place that collects and recycles lithium ion batteries. To search online, go to [www.call2recycle.org](http://www.call2recycle.org) and enter your zip code, or if you prefer to locate a place by phone, dial 1-877-2-RECYCLE to find the nearest retailer that collects lithium ion batteries.

#### **STORAGE AND DAILY CARE**

1. Do not store the inverter in direct sunlight, in damp places, or in temperatures below - 5° C (23° F) or above 40° C (107° F).
2. Fully charge the battery every three months if not in use.
3. Keep the inverter clean (See section on Cleaning and Servicing).

### **GENERAL TROUBLESHOOTING**

If you experience problems with your inverter, please refer first the following troubleshooting guide:

#### **Problem: The inverter does not operate.**

Possible causes/solutions:

1. The inverter is not turned on. **Solution:** Turn on inverter by pressing on/off button.
2. The battery is not charged. **Solution:** Charge Battery.
3. The battery is not locked and secured. **Solution:** Secure battery connections.

#### **Problem: The Inverter Operates Intermittently.**

Possible causes/solutions:

1. The battery is low on charge. **Solution:** Recharge Battery.

2. The battery is not locked and secured into its base. **Solution:** Secure battery connection
3. The inverter is over heated and is protecting itself. **Solution:** Check the appliance to see if it is rated more than 500 watt.

**Problem: Inverter shuts down when turning on the appliance.**

Possible causes/solutions:

1. Your appliance has a starting instant power requirement above 740 watt. **Solution:** Check your appliance and try a smaller power rating appliance.

IF YOU'VE CONSULTED THE TROUBLESHOOTING GUIDE AND ARE STILL HAVING PROBLEMS WITH YOUR INVERTER, PLEASE CONTACT CUSTOMER SERVICE by phone at 855-500-2640, by email at [support@getglion.com](mailto:support@getglion.com) or on our website: [www.getglion.com](http://www.getglion.com). Also visit our website for replacement parts, product support, and instructional videos. Use only replacement parts supplied by Glion.

## **CLEANING, STORING, AND SERVICING**

1. **KEEP YOUR INVERTER DRY:** Do not ride your inverter in wet conditions unless unavoidable. Dry off your inverter immediately.
2. **KEEP YOUR INVERTER CLEAN:** Remove dust and dirt from your inverter with a wrung-out, damp rag. Dry immediately. Never use solvents. Do not spray your inverter down with water or submerge it.
3. **STORAGE:** Do not store your inverter or battery in direct sunlight or in a high temperature environment like inside of your car. Store your inverter indoors, out of the elements. Room temperature is ideal for storage. Avoid storing the inverter in wet environments. Recharge the battery in full after it has been completely discharged and before storing the battery for longer periods. Even in storage, please monitor the battery level and recharge the battery fully at least once every 3 months.
4. **SERVICE.** Should your inverter require service, please contact customer service through our website ([www.getglion.com](http://www.getglion.com)). Your satisfaction is our greatest priority!

## **PRODUCT REGISTRATION**

We encourage you to register your Glion Electric Inverter with us. Registration helps us ensure your continued satisfaction and enables us to contact you with new product instructions. Also, registration and proof of purchase are necessary to make a warranty claim. Please register your Glion Electric Inverter at [www.getglion.com/register](http://www.getglion.com/register). Please keep your original proof of purchase in a safe place in the event of a warranty claim. **Inverter serial number is located on the bottom side.**



**WARNING: Please register your inverter with us. If you don't, we may not be able to contact you directly with important safety recall information.**

### **GLĪON Inverter LIMITED WARRANTY**

Probity Cell LLC, dba Glīon® ("Probity Cell") warrants to the first retail purchaser of this product that it is free from defect in materials and/or workmanship for a period of 12 months from the date of purchase. This limited warranty does not cover normal wear and tear or any damage, failure or loss caused by improper maintenance, storage or use of the Glion Inverter. This limited warranty will be void if the product is ever used in a manner other than specified in this manual, opened/modified in any way, or rented.

If a defect exists, Probity Cell will, at its option and to the extent permitted by law either (1) provide components to repair the Glion Inverter using new or refurbished parts at no charge to you; (2) exchange the Glion Inverter with a functionally equivalent product that is new or refurbished; or (3) refund the original purchase price. After repair or replacement, the Glion Inverter/functionally equivalent product will be covered by this limited warranty for the longer of the remainder of the original limited warranty period, or 90 days after Probity Cell ships the Glion Inverter/functionally equivalent product to you. Probity Cell's responsibility to repair or replace the Glion Inverter, or to refund the purchase price, is your exclusive remedy. This warranty excludes damage caused by abuse, misuse, accidents, unauthorized repairs, alterations, modifications, failure to follow instructions in the User's Instruction Manual and battery Operating Instruction, or other causes that are not defects in materials and workmanship for which Probity Cell is responsible.

This Limited Warranty does not cover parts which may, under normal wear and tear, require replacement including, without limitation, tires, upholstery, fuses, etc.

**TO THE EXTENT PERMITTED BY APPLICABLE LAW, PROBITY CELL IS NOT LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR SERVICE OF THE GLION INVERTER. THE WARRANTY AND REMEDIES STATED ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES OR CONDITIONS, WHETHER ORAL, WRITTEN, EXPRESS, STATUTORY, OR IMPLIED TO THE EXTENT PERMITTED BY APPLICABLE LAW. PROBITY CELL SPECIFICALLY DISCLAIMS ALL IMPLIED AND STATUTORY WARRANTIES INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IF IMPLIED WARRANTIES CANNOT BE DISCLAIMED, SUCH WARRANTIES ARE LIMITED IN**

**DURATION TO THE DURATION OF THIS WARRANTY. Any recovery is limited to the original purchase price. No person is authorized to modify this Limited Warranty.**

**THIS WARRANTY DOES NOT AFFECT YOUR STATUTORY RIGHTS.**

Some states do not allow limitations on how long an implied warranty lasts, or exclusions of incidental or consequential damages and the above limitations may not apply to you. This Limited Warranty gives you specific legal rights. You may have other rights, which vary from state to state.

This warranty and all lawsuits, disputes, and claims will be governed by and interpreted under the laws of the State of Nebraska, regardless of any conflict of law principles. The parties also irrevocably consent to the jurisdiction of the District Court of Phelps County, Nebraska, and agree that the District Court of Phelps County, Nebraska shall have exclusive jurisdiction and be the sole venue for the consideration of any lawsuits, disputes, and claims between the parties.

The parties hereby waive the right to any jury trial on any lawsuit, dispute, claim, or controversy. The parties also waive any right to consolidate or to have handled as a class action any proceeding on any lawsuit, dispute, claim, or controversy. The parties agree that any proceedings will be conducted solely on an individual basis. The parties agree not to seek to have any lawsuit, dispute, claim, or controversy heard as a class action, private attorney general action, or in any other proceeding in which either party acts or proposes to act in a representative capacity.

If any provision herein is found to be illegal or unenforceable, that provision will be severed with the remaining in full force and effect.

**YOUR INSURANCE POLICIES MAY NOT PROVIDE COVERAGE FOR  
ACCIDENTS INVOLVING THE USE OF THIS INVERTER. TO  
DETERMINE IF COVERAGE IS PROVIDED, YOU SHOULD CONTACT  
YOUR INSURANCE COMPANY OR AGENT.**